


E/BA GIUNTI ELASTICI A PIOLI **CON FLANGIA** / PINS ELASTIC COUPLINGS **WITH FLANGED**

Giunto standard: ghisa UNI EN 1561 EN-GJL-HB 175
 Standard coupling: cast iron UNI EN 1561 EN-GJL-HB 175
 Flangia: acciaio UNI EN 10277-2-C45
 Flange: steel UNI EN 10277-2-C45
 Perni standard: acciaio zincato
 Standard pivot: galvanized steel
 Piolo in gomma: Shore 75-80 temperatura di esercizio -20° +80°
 Rubber pin: Shore 75-80 operating temperature -20° +80°
 A richiesta giunto completamente in C45 o INOX
 Coupling completely made of C45 or stainless steel upon request



TIPO TYPE	Mt torque [Nm]	∅ grezzo/max. raw/max. [mm]	F [mm]	F1 [mm]	L [mm]	H [mm]	K [mm]	K1 [mm]	M [mm]	S [mm]	N° perni Pivot	∅ perni Pivot
E120BA	175	- / 45	120	A richiesta Upon request	93	3	20	20	71	70	5	8
E140BA	300	- / 55	140		103	3	20	20	85	80	7	8
E160BA	450	- / 60	160		113	3	20	20	102	90	8	8
E180BA	650	- / 65	180		129	4	25	25	103	100	6	12
E200BA	900	- / 75	200		144	4	25	25	116	115	7	12
E225BA	1300	40 / 90	225		159	4	25	25	145	130	8	12
E250BA	2300	45 / 95	250		193	5	38	38	147	150	7	18
E300BA	3250	50 / 110	300		223	5	38	38	182	180	8	18
E350BA	5250	60 / 120	350		266	6	60	60	200	200	6	25
E400BA	7250	70 / 140	400		286	6	60	60	232	220	7	25

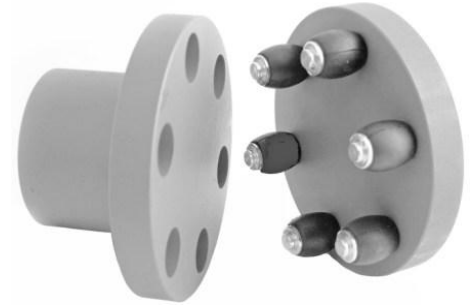