

# TF/C40

**TRASMISSIONI FLESSIBILI A LAMELLE**  
**FLEXIBLE LAMELLAE TRANSMISSIONS**

**Giunto standard:** acciaio UNI EN 10277 C40

**Standard coupling:** steel UNI EN 10277 C40

**Perni standard:** acciaio fosfatato al manganese

**Standard pivot:** manganese phosphated steel

**Pacco lamellare PN:** acciaio fosfatato al manganese temperatura di esercizio -30° +120°

**PN lamellae pack:** manganese phosphated steel operating temperature -30° +120°

**Allunga centrale:** acciaio UNI EN 10305-1-E235+A


**Central spacer:** steel UNI EN 10305-1-E235+A

A richiesta trasmissione completamente in INOX  
Entirely stainless steel transmission upon request

**Varianti/Variants:**

**TF xxx C40 GN** → Pacco lamellare: lamelle C67/bussole AVP/bulloni 8.8/dadi 8(6S)  
Lamellae pack: lamellae C67/AVP bushes/8.8 bolts/nuts 8(6S)

**TF xxx C40 GTI** → Pacco lamellare: lamelle/bussole/bulloni/dadi in INOX 316  
Lamellae pack: lamellae/bushes/bolts/nuts in INOX 316

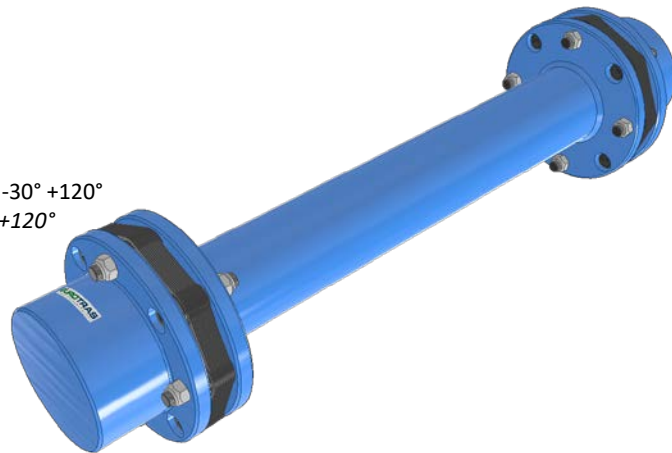

Grandezza Size	T <sub>KN</sub> [Nm]	T <sub>K max</sub> [Nm]	Velocità Massima [giri/min] Max Speed [rpm]	Ø grezzo/max. raw/max. [mm]	F [mm]	L [mm]	H [mm]	K [mm]	M [mm]	S [mm]	N° Perni Pivot	Ø Perni Pivot [mm]
TF 95 C40	640	1280	10800	- / 35	90	A richiesta Upon request	16	10	48	35	8	10XM10
TF 110 C40	920	1840	10800	- / 50	110		16	10	66	55	12	10XM10
TF 135 C40	1420	2840	10800	- / 60	135		16	12	80	65	12	12XM12
TF 150 C40	1600	3200	9540	- / 70	152		16	14	95	75	12	12XM12
TF 186 C40	2800	5600	7200	- / 95	185		26	15	125	80	16	12XM12
TF 216 C40	3500	5000	5940	- / 100	215		26	20	145	95	16	12XM12
TF 227 C40	7200	14400	5760	45 / 100	225		37	25	134	110	8	24XM24
TF 250 C40	12000	24000	5400	45 / 120	250		37	38	158	120	12	24XM24
TF 300 C40	18000	36000	4500	50 / 147	300		37	38	206	145	12	24XM24
TF 350 C40	27000	54000	3960	60 / 180	350		46	60	260	170	16	24XM24
TF 400 C40	36000	72000	3240	70 / 200	400		46	60	282	200	20	24XM24
TF 450 C40	50000	100000	2880	75 / 220	450			72	340	210	24	24XM24
TF 500 C40	70000	140000	2520	75 / 260	500			72	400	250	28	24XM24
TF 550 C40	88000	176000	2160	75 / 300	550			72	440	270	32	24XM24
TF 630 C40	180000	360000	1800	90 / 300	630			90	430	295	24	45XM30
TF 730 C40	220000	440000	1620	130 / 350	730			90	500	310	28	45XM30
TF 830 C40	290000	580000	1368	130 / 400	830			90	615	320	32	45XM30
TF 900 C40	370000	740000	1224	130 / 480	900			90	700	340	36	45XM30

